


SUBSEA ANODE CLAMP

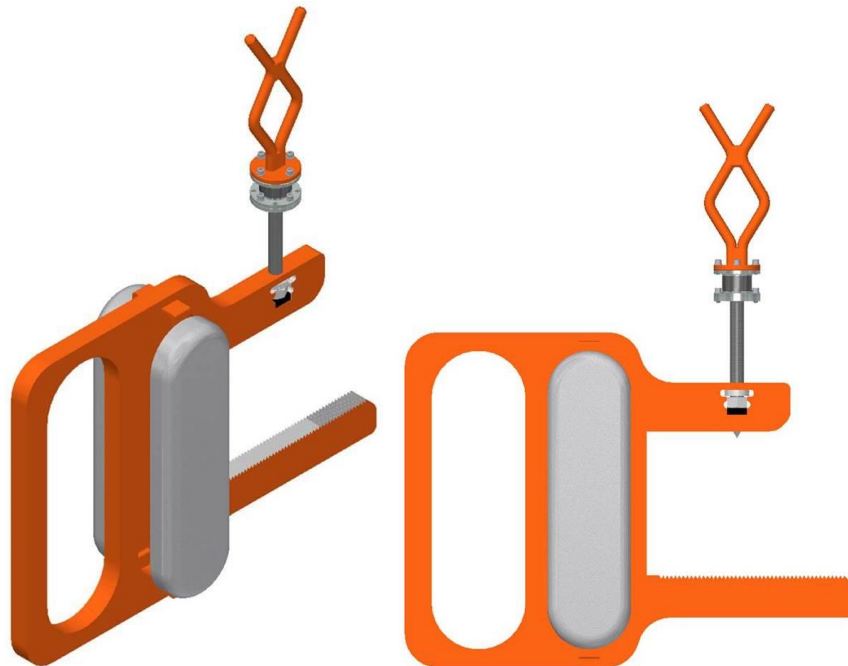

The **Subsea anode clamp** is a universal anode clamp that can be mounted on metal surfaces. The clamp opening is placed onto the structure and secured in place by operating the ROV handle. The structure is designed tension up when the handle is turned and tightened up. This in combination with two-disc springs in the ROV handle mechanism ensures that the clamp is properly secured to the metal.

SPECIFICATIONS

Type	Anode Clamp
Model	ROV Operated
Part number	7266-002
Dimensions HxWxL	660-715 x 400 x 116 mm
Dimensions opening HxL	130 x 105 mm
Dimensions w/fishtale H, Ø	480-550 mm, Ø112
Weight in air	40 kg
Weight in water	34 kg
ROV handle	Fishtail (standard)
Anode clamp jaw opening	Customer specific

- Optional ROV handles (D and T- handles)

