


## SUBSEA PRESSURE CONNECTORS 2-6"

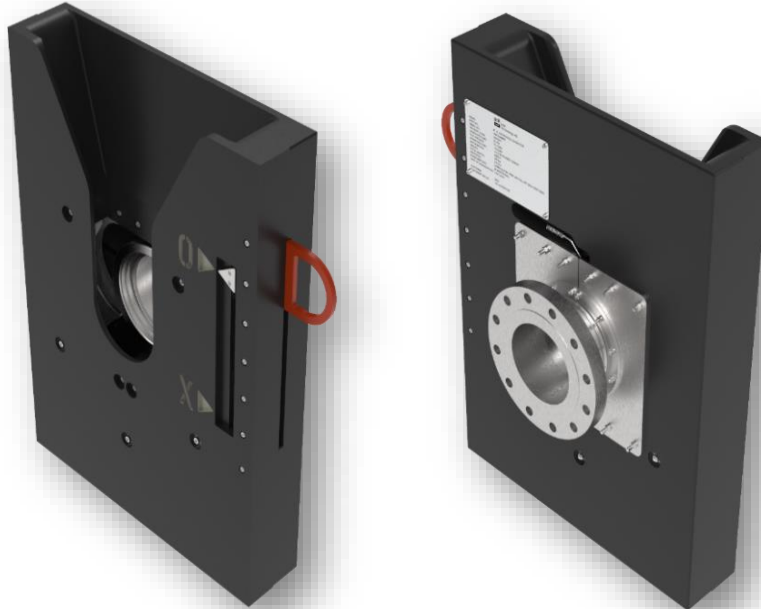

The **Subsea Pressure Connectors** are ROV operated connectors intended for temporary or permanent installations subsea. They have dual seals and a seal test -port. All flange interfaces and materials can be adjusted to fit customer needs.

Type	Subsea process connector	Subsea process connector	Subsea process connector
<b>Model</b>	2" pressure	4" pressure	6" pressure
<b>Permanent/temporary installation</b>	Permanent	Permanent	Permanent
<b>Part Number</b>	GNT-6008577	GNT-1043510	GNT-6008578
<b>Material</b>	Super Duplex, POM, PETP	Super Duplex, POM, PETP	Super Duplex, POM, PETP
<b>Depth rating</b>	No limitations	No limitations	No limitations
<b>Dimensions (LxWxH)</b>	667* x 250 x 760 mm	834* x 309 x 950 mm	803* x 285 x 980 mm
<b>Weight air</b>	157 kg	197 kg	233 kg
<b>Weight water</b>	87 kg	109 kg	131 kg
<b>Flow limitation</b>	Full bore	Full bore	Full bore
<b>Pressure rating</b>	Class 300	Class 300	Class 300

\*Length with handle