


## SUBSEA PRESSURE CONNECTORS 8-12"

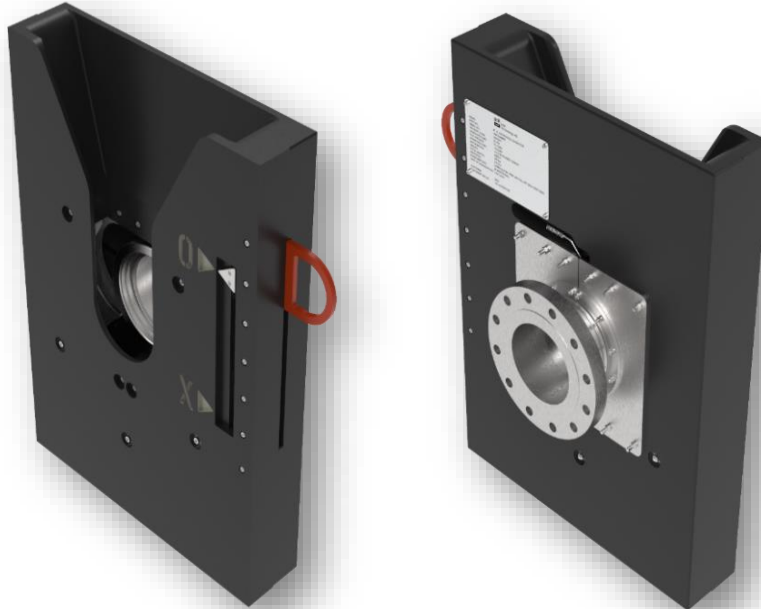

The **Subsea Pressure Connectors** are ROV operated connectors intended for temporary or permanent installations subsea. They have dual seals and a seal test -port. All flange interfaces and materials can be adjusted to fit customer needs.

Type	Subsea process connector	Subsea process connector	Subsea process connector	Subsea process connector
<b>Model</b>	8" pressure	8" pressure	10" pressure	12" pressure
<b>Permanent/temporary installation</b>	Permanent	Permanent	Permanent	Permanent
<b>Part Number</b>	GNT-1054125	GNT-1039940	GNT-1043509	GNT-6008576
<b>Material</b>	Super Duplex, POM, PETP	Super Duplex, POM, PETP	Super Duplex, POM, PETP	Super Duplex, POM, PETP
<b>Depth rating</b>	No limitations	No limitations	No limitations	No limitations
<b>Dimensions (LxWxH)</b>	1004* x 325 x 1200 mm	1004* x 337 x 1200 mm	1139* x 325 x 1370 mm	1326* x 345 x 1245 mm
<b>Weight air</b>	280 kg	292 kg	348 kg	309 kg
<b>Weight water</b>	150 kg	164 kg	187 kg	217 kg
<b>Flow limitation</b>	Full bore	Full bore	Full bore	Full bore
<b>Pressure rating</b>	Class 150	Class 300	Class 150	Class 150

\*Length with handle